

Caveats

Parsing 1

The discussion of parsing that follows focuses entirely on the use of the standard stream classes when parsing text input. The stream hierarchy is large, and only a small subset of its functionality is presented.

Generally, C++ approaches are preferred to C approaches. Thus, for example, there is no discussion of the use of null-terminated `char` arrays to store character strings. Instead, the standard `string` type is used throughout.

These notes are not intended to be a comprehensive tutorial. Rather, they provide an overview of some C++ features that are commonly used in projects typically used in CS 1044 through CS 2604. The reader is advised to consult a good C++ textbook, such as Deitel and Deitel, or a good C++ reference, such as Stroustrup's *The C++ Programming Language*.

I/O involving binary data raises different issues and requires different techniques. A separate discussion of binary file I/O is available, probably in the immediate vicinity of these notes.

Streams

Parsing 2

The basic data type for I/O in C++ is the `stream`. C++ incorporates a complex hierarchy of stream classes. The most basic stream types are:

Standard Input Streams

header file: `<iostream>`

- `istream cin` built-in input stream variable; by default hooked to keyboard
- `ostream cout` built-in output stream variable; by default hooked to console

Note: `cin` and `cout` are predefined variables, not types.

File Stream Types

header file: `<fstream>`

- `ifstream` hooked to desired input file by use of `open()` member function
- `ofstream` hooked to desired output file similarly

String Stream Types


header file: `<sstream>`

- `istringstream` hooked via constructor to a string object for input
- `ostringstream` hooked via constructor to a string object for output

Conceptual Model of a Stream

Parsing 3

A `stream` provides a connection between the process that initializes it and an object, such as a file, which may be viewed as a sequence of data. In the simplest view, a stream object is simply a serialized view of that other object.

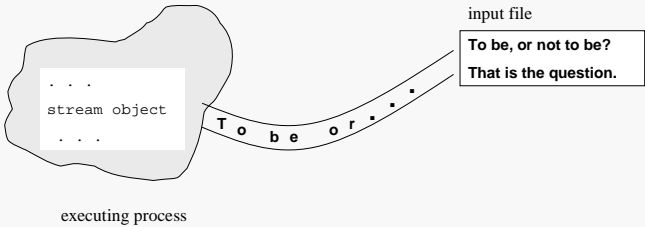

We think of data as flowing in the `stream` to the process, which can remove data from the `stream` as desired. The data in the `stream` cannot be lost by “flowing past” before the program has a chance to remove it.

The `stream` object provides the process with an “interface” to the data.

Associating a File Stream with a File

Parsing 4

Two basic methods:

object constructor:

```
ifstream In("infoo.txt");
ofstream Out("outfoo.txt");
```

`open()`:

```
ifstream In;
In.open("infoo.txt");

ofstream Out;
Out.open("outfoo.txt");
```

File must (normally) be in current directory.  
If named input file is not found, the stream is not properly initialized.  
If named output file is not found, an empty file of that name is created.  
If named output file is found, it is opened and its contents deleted (truncated).  
When finished with a file, input or output, the user should invoke the `close()` member function to signal that fact to the OS:  
`Out.close();`  
That's right, no file name is used.  
Never, ever, call `close()` on `cin` or `cout`.

Basic Stream Input

Parsing 5

Because the various stream types are related (via inheritance), there is a common set of operations for input and output that all support. In the discussion below, `In` can be any type of input stream object and `Out` any type of output stream object.

Input via extraction: `In >> TargetVariable;`

- `>>` is the extraction operator
- left hand side must be an input stream variable
- right hand side must be a variable of a built-in type (pending overloading later)
- the operation attempts to extract the first complete “object” from the stream that matches the target variable in type; some automatic conversions (such as `int` to `double`) are supported
- leading whitespace is automatically ignored (i.e., extracted and discarded)
- in general, the type of the target variable should conform to the type of data that will occur next in the input stream
- extractions may be chained, as:

```
In >> var1 >> var2 >> var3 >> . . .
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Basic Input Examples

Parsing 6

Suppose the stream `In` is connected to a source containing the text below. The numbers are separated by whitespace.

23 42 3.14 ...

Assume the declarations:

```
int A, B;
double X;
```

Executing the statement below on the given stream:

```
In >> A >> B >> X;
```

results in `A == 23`, `B == 42`, and `X == 3.14`.

Executing the statement below on the given stream:

```
In >> X >> A >> B;
```

results in `A == 42`, `B == 3`, and `X == 23.0`.

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Basic Input Examples

Parsing 7

Suppose the stream `In` is connected to a source containing the text below. The numbers are separated by whitespace.

24.73 ...

Assume the declarations:

```
int A, B;
char C;
double X;
```

Consider executing each statement below on the given stream:

```
In >> X;           // X == 24.73
In >> A;           // A == 24
In >> A >> B;      // A == 24 and then failure
In >> A >> C >> B; // A == 24, C == '.', B == 73
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Basic Input Examples

Parsing 8

Suppose the stream `In` is connected to a source containing the text below. The numbers are separated by whitespace.

W42 B73 ...

Assume the declarations:

```
int A;
char C, D, E;
string S;
```

Consider executing each statement below on the given stream:

```
In >> C >> A;      // C == 'W' and A == 42
In >> C >> D >> E; // C == 'W', D == '4', E == '2'
In >> S;           // S == "W42"
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Basic Stream Output

Parsing 9

Output via insertion:      `Out << SourceVariable;`

- `<<` is the insertion operator
- left hand side must be an output stream variable
- right hand side must be a variable of a built-in type (pending overloading later)
- the operation attempts to write to the output stream a sequence of characters (keep it simple for now) that represents the value of the source variable; some automatic formatting rules are supported
- whitespace is not automatically inserted between inserted values
- user may also use manipulators to control the formatting precisely
- insertions may be chained, as:

```
Out << var1 << var2 << var3 << . . .
```

Reading Single Characters: `get()`

Parsing 10

Input stream objects have a member function named `get ( )` which returns the next single character in the stream, whether it is whitespace or not.

```
char someChar;  
In.get(someChar);
```

This call to the `get ( )` function will remove the next character from the stream `In` and place it in the variable `someChar`.

If we had a stream containing “A M” (one space between A and M) we could read all three characters by;

```
char ch1, ch2, ch3;  
In >> ch1;           // read 'A'  
In.get(ch2);          // read the space  
In >> ch3;           // read 'M'
```

We could also have used the `get ( )` function to read all three characters.

Skipping and Discarding Characters: `ignore()`

Parsing 11

There is also a simple way to remove and discard characters from an input stream:

```
In.ignore(N, ch);
```

means to skip (read and discard) up to `N` characters in the input stream, or until the character `ch` has been read and discarded, whichever comes first. So:

```
In.ignore(80, '\n');
```

says to skip the next 80 input characters or to skip characters until a newline character is read, whichever comes first.

The `ignore` function can be used to skip a specific number of characters or halt whenever a given character occurs:

```
In.ignore(100, '\t');
```

means to skip the next 100 input characters, or until a tab character is read, whichever comes first.

Using `ignore()`

Parsing 12

Suppose the input stream is connected to the file shown below. The first three lines are just column labels to make the examples easier to follow. For the remaining lines, a single space separates numbers on the same line, and the last digit on each line is followed by a newline.

```
00000000001111111111  
01234567890123456789  
-----  
147 89 901 888  
17 325 7 2234  
90 555 314 229
```

```
In.ignore(INT_MAX, '\n'); // Using INT_MAX as the numeric  
In.ignore(INT_MAX, '\n'); // limit causes an ignore to  
In.ignore(INT_MAX, '\n'); // continue until a '\n' is found.  
  
In.ignore(9, '\n');       // Skips 9 characters w/o reaching a  
                           // newline.  
  
In >> A;  
cout << "A = " << A << endl; // A == 1
```

Using ignore()

Parsing 13

Making the same assumptions as before, and not showing the code to skip the first three lines:

```
0000000000111111111
01234567890123456789
-----
147 89 901 888
17 325 7 2234
90 555 314 229
```

```
...
In.ignore(INT_MAX, '\n'); // Skips entire line.
In >> A;
cout << "A = " << A << endl; // A == 17

...
In.ignore(100, '9'); // Skips until a '9' is read.
In >> A;
cout << "A = " << A << endl; // A == 901 (2nd '9' here)

In.ignore(1024, '6'); // There's no '6' in the file;
// will skip to EOF.
In >> A; // This will fail. . .
cout << "A = " << A << endl; // A == ??
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Variant Calls to ignore()

Parsing 14

The function ignore() provides default values for its two parameters:

```
In.ignore(NumericLimit, StopCharacter);
```

By default, the numeric limit is 1 and the stop character is EOF.

This will skip 100 characters unless the EOF is encountered first:

```
In.ignore(100);
```

This will skip 1 character unless the EOF is encountered first:

```
In.ignore();
```

This will skip to the EOF:

```
In.ignore(INT_MAX);
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Setting the Field Width for Output

Parsing 15

setw( ):

header file: <iomanip>

- sets the field width (number of spaces in which the value is displayed).
- setw( ) takes one parameter, which must be an integer.
- The setw( ) setting applies to the next single value output only.
- may be used with numeric values, character values, and strings
- by default, output is right-justified (shoved to the right) in the field

```
...
int A = 10, B = 20, C = 30;
Out << setw(10) << A << setw(10) << B << C;
```

```
00000000001111111112222222222333333333
0123456789012345678901234567890123456789
10      2030
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Padding and Justification Manipulators

Parsing 16

Padding Output

- By default the pad character for justified output is the space (blank) character.
- This can be changed by using the fill( ) manipulator:

```
Out << setfill('0'); //pad with zeroes
Out << setw(9) << StudentID; // e.g.: 000123456
Out << setfill(' '); //reset padding to spaces
```

Left Justification

- The default justification in output fields is to the right, with padding occurring first (on the left).
- To reverse the default justification to the left:

```
Out << left; //turn on left justification
// insert left justified output statements here
Out << right; //restore right justification
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Examples

Parsing 17

```
int A = 42;
int B = -79;
char C = 'c', D = 'd';

cout << "000000000111111111" << endl
      << "01234567890123456789" << endl;

cout << setw(10) << A << B << endl;
cout << left << setw(10) << A << setw(10) << B << endl;
cout << right << setw(10) << A << endl;
cout << setw(10) << C << setw(10) << D << endl;
cout << left;
cout << setw(10) << C << setw(10) << D << endl;
cout << right;
```

```
000000000111111111
01234567890123456789
      42-79
42      -79
      42
      c      d
c      d
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Setting the Precision of Decimal Output

Parsing 18

setprecision( ):

header file: <iomanip>

- sets the precision, the number of digits shown after the decimal point.
- setprecision( ) also takes one parameter, which must be an integer.
- The setprecision( ) setting applies to all subsequent floating point values, until another setprecision( ) is applied.
- often applied to the stream before output if the same setting is desired for all subsequent decimal output.

To activate manipulators for floating point output to the stream Out, include:

```
Out << fixed << showpoint;
```

Omitting this will cause setprecision( ) to fail, and will cause integer values to be printed without trailing zeroes regardless of setprecision( ).

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Setting the Base of Integer Output

Parsing 19

It is possible to specify the numeric base for integer output:

header file: <iomanip>

```
Out << hex << 43; // prints: 2B (43 in base 16)
```

There are three base manipulators:

dec	selects base 10
oct	selects base 8
hex	selects base 16

Each of these manipulators sets the state of the stream, that is, they remain in effect until changed by insertion of another base manipulator:

```
Out << hex << 43 // prints: 2B
    << 19        //      13
    << oct << 19; //      23
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Reading to Input Failure

Parsing 20

When you attempt to extract a value from the input stream, the stream variable returns an indication of success (true) or failure (false). You can use that to check for when you've reached the end of the file from which you're reading data, or if the input operation has failed for some other reason.

A while loop may be used to extract data from the input stream, stopping automatically when an input failure occurs.

Note well: a preliminary or priming read is used before the while loop. Failure to do that will almost certainly lead to incorrect performance (see slide 14).

```
Now is the
time for
all good men
to come to the
aid of their party!
```

represents the return char
\$ represents the end of file char

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Failure-Controlled Input Example

Parsing 21

```
#include <fstream>
using namespace std;

void main( ) {
    int anInt;
    ifstream inStream;
    ofstream outStream;
    inStream.open("infile.dat");
    outStream.open("outfile.dat");

    inStream >> anInt;                // priming read before loop

    while (inStream) {                // check for read failure
        outStream << anInt << endl;    // print value
        inStream >> anInt;            // read next value at end of
    }                                  // the loop body

    inStream.close( );
    outStream.close( );
}
```

It is important to understand the logic of this program. Reading to input failure is often necessary and alternative logical designs are likely to be incorrect.

Failure-Controlled Input Example

Parsing 22

The program given on the previous slide will produce the output file shown below from the input file shown below:

infile.dat	outfile.dat
171    32    41    17\$	171¶ 32¶ 41¶ 17¶\$

. . . and it will produce the output file shown below from the input file shown below:

infile.dat	outfile.dat
171    32    Fred    17\$	171¶ 32¶\$

At this point, an integer is expected, and the next data is not a valid digit or '+' or '-'. An input failure occurs and the stream fails.

Incorrect Failure-Controlled Input

Parsing 23

```
#include <fstream>
using namespace std;

void main( ) {
    int anInt;
    ifstream inStream;
    ofstream outStream;
    inStream.open("infile.dat");
    outStream.open("outfile.dat");
    // no priming read before loop
    while (inStream) {                // check for read failure
        inStream >> anInt;            // read next value at start
        // of the loop body
        outStream << anInt << endl;    // print value
    }
    inStream.close( );
    outStream.close( );
}
```

This program will not produce correct output. Logically, the problem is that the last input operation is not followed immediately by a test for success/failure.

171    32    41    17\$	171¶ 32¶ 41¶ 17¶ 17¶\$
-------------------------	------------------------------------

Detecting end-of-file: eof( )

Parsing 24

The end of a file is marked by a special character, called the end-of-file or EOF marker.

eof( ) is a boolean stream member function that returns true if the last input operation attempted to read the end-of-file mark, and returns false otherwise.

The loop test in the program on the previous slide could be modified as follows to use eof( ):

```
inStream >> anInt;

while (!inStream.eof()) {            // check for eof()
    outStream << anInt;              // print value
    inStream >> anInt;              // read next value
}
```

This while loop will terminate when eof( ) returns false.

**In general, reading until input failure is safer than the technique illustrated here. The code shown above will not terminate gracefully if an input failure occurs in the middle of the input file.**

Look-ahead parsing: peek( )

Parsing 25

peek( ) provides a way to examine the next character in the input stream, without removing it from the stream.

For example, the following code skips whitespace characters in the input stream:

```
char ch;
ch = inFile.peek(); // peek at first character

// while the first character is a space, tab or newline
while ( (ch == ' ' || ch == '\t' || ch == '\n') && (inFile) ) {

    inFile.get(ch); // remove it from the stream

    ch = inFile.peek(); // peek at the (new) first char
}
```

Changing your mind: putback( )

Parsing 26

putback( ) provides a way to return the last character read to the input stream.

For example, the following code also skips whitespace characters in the input stream:

```
char ch;
inFile.get(ch); // remove first character from stream

// while you just got a space, tab or newline
while ( (ch == ' ' || ch == '\t' || ch == '\n') && (inFile) ) {

    inFile.get(ch); // remove next character from stream
}

inFile.putback(ch); // last character read was
                  // not whitespace, so put it back
```

Checking for Stream Failure: fail( )

Parsing 27

fail( ) provides a way to check the status of the last operation on the input stream.

fail( ) returns true if the last operation failed and returns false if the operation was successful.

```
#include <fstream>
using namespace std;

void main( ) {
    ifstream inStream("infile.dat");

    if ( inStream.fail() ) { // !In will also work
        cout << "File Not Found";
        return;
    }

    // . . . now do interesting stuff . . .
}
```

Recovering from Stream Failure: clear( )

Parsing 28

If an input stream goes into a fail state, it remains in that state unless it is explicitly reset. Even closing and re-opening the file will not work.

clear( ) provides a way to restore a failed stream to use.

```
infile.dat
. . .
const int MAXDATA = 100;
string Name;
int Idx = 0, tmpInt;
int Data[MAXDATA];
ifstream In("infile.dat");

In >> tmpInt;
while ( In ) {
    Data[Idx] = tmpInt;
    In >> Data[Idx];
    Idx++;
}
In.clear();
In >> Name;
In.ignore(INT_MAX, '\n');
. . .
```

infile.dat  
42 13 27 9 3 foo  
8 129 89 bar

Here we have input lines that begin with a variable number of integer values, followed by a character string... the problem is to read all the integers w/o knowing how many there are and then recover to read the string.

This could also be achieved by using peek() and isdigit().

Working with Character Strings

Parsing 29

The C++ language provides three ways to deal with sequences of characters:

- string literals (constants) such as: "Hello, world"
- C-style arrays of char such as: char myCharArray[100];
- string objects such as: string myStringObject;

From a modern perspective, the addition of the string type to the C++ language renders the use of char arrays for variable character data obsolete.

String objects are simpler to use because they adjust to the size of the data stored and eliminate the problems associated with the array dimension.

String objects provide a robust library of member functions to manipulate character data.

String objects are type-safe, and may be used for the return value from a function, unlike an array.

The following notes discuss parsing with string objects. For a more general overview of string objects, see the Chapter 12 on String Objects in the CS 1044 notes (online).

String Objects

Parsing 30

string type may be declared and optionally initialized as:

header file: <string>

```
string Greetings;
string Greetings2("Hello, world!"); // constructor syntax
string Greetings3 = "Hello, world!"; // initialization syntax
```

string objects may be assigned using =, and compared using ==, >, <, etc.

string objects do NOT store their data as a C-style null-terminated char array.

The limit on the number of characters a string object can store can be found using the member function capacity():

```
cout << Greetings2.capacity() << endl;
```

Prints 31

However, the capacity will increase automatically as needed:

```
Greetings2 = "Everything should be made as simple as possible";
cout << Greetings2.capacity() << endl;
```

Prints 63

String Output

Parsing 31

A string variable may be printed by inserting it to an output stream, just as with any simple variable:

```
cout << Greetings3 << endl;
```

Just as with string literals, no whitespace padding is provided automatically, so:

```
cout << Greetings3 << "It's a wonderful day!";
```

would print:

```
Hello, world!It's a wonderful day!
```

as opposed to:

```
cout << Greetings3 << " " << "It's a wonderful day!";
```

Manipulating String Output

Parsing 32

setw() may be used, along with the justification and padding manipulators, to control the formatting of string output:

```
string S = "Flintstone, Fred";

cout << "000000000111111111222222222333333333" << endl
    << "0123456789012345678901234567890123456789" << endl;
cout << setw(40) << S << endl;
cout << left;
cout << setw(40) << S << endl;
cout << right << setfill('*');
cout << setw(40) << S << endl;
```

```
000000000111111111222222222333333333
0123456789012345678901234567890123456789
                                Flintstone, Fred
Flintstone, Fred
*****Flintstone, Fred
```

String Input: extraction

Parsing 33

The stream extraction operator may be used to read characters into a string variable:

```
string Greetings;  
In >> Greetings;
```

The extraction statement reads a whitespace-terminated string into the target string (Greetings in this case), ignoring any leading whitespace and not removing the terminating whitespace character, or it in the target string.

The amount of storage allocated for the variable Greetings will be adjusted as necessary to hold the number of characters read. (There is a limit on the number of characters a string variable can hold, but that limit is so large it is of no concern.)

Of course, it is often desirable to have more control over where the extraction stops.

Delimited Input: getline( )

Parsing 34

The getline( ) standard library function provides a simple way to read character input into a string variable, controlling the “stop” character.

Suppose we have the following input file:

Fred Flintstone	Laborer	13301
Barney Rubble	Laborer	43583

String1.dat

There is a single tab after the employee name, another single tab after the job title, and a newline after the ID number.

Assuming iFile is connected to the input file above, the statements

```
string String1;  
getline(iFile, String1);
```

Whereas, the statement  
iFile >> String1;  
would have stored “Fred” in String1.

would result in String1 having the value:

```
"Fred Flintstone Laborer 13301"
```

Delimited Input: getline( )

Parsing 35

As used on the previous slide, getline( ) takes two parameters. The first specifies an input stream and the second a string variable.

Called in this manner, getline( ) reads from the current position in the input stream until a newline character is found.

Leading whitespace is included in the target string.

The newline character is removed from the input stream, but not included in the target string.

It is also possible to call getline( ) with three parameters. The first two are as described above. The third parameter is a char, which specifies the “stop” character; i.e., the character at which getline( ) will stop reading from the input stream.

By selecting an appropriate stop character, the getline()function can be used to read text that is formatted using known delimiters. The example program on the following slides illustrates how this can be done with the input file specified previously.

Delimited Input Example

Parsing 36

```
#include <fstream> // file streams  
#include <iostream> // standard streams  
#include <string> // string variable support  
using namespace std; // using standard library  
  
void main() {  
  
    string EmployeeName, JobTitle; // strings for name and title  
    int EmployeeID; // int for id number  
  
    string fName = "String1.dat";  
    ifstream iFile( fName.c_str() );  
  
    if ( iFile.fail() ) {  
        cout << "File not found: " << fName << endl;  
        return;  
    }  
  
    // Priming read:  
    getline(iFile, EmployeeName, '\t'); // read to first tab  
    getline(iFile, JobTitle, '\t'); // read to next tab  
    iFile >> EmployeeID; // extract id number  
    iFile.ignore(80, '\n'); // skip to start of next line  
}
```

Member function c\_str() returns a C-style string, which is what open() requires.

See later slide for better error handling.

Delimited Input Example

Parsing 37

```
while (iFile) {
    cout << "Next employee: " << endl;           // read to failure
    cout << EmployeeName << endl;                // print record header
    cout << JobTitle << " " << EmployeeID << endl; // name on one line
    // title and id number
    // on another line

    getline(iFile, EmployeeName, '\t');           // repeat priming read
    getline(iFile, JobTitle, '\t');               // logic
    iFile >> EmployeeID;
    iFile.ignore(80, '\n');

}

iFile.close(); // close input file
}
```

This program takes advantage of the formatting of the input file to treat each input line as a collection of logically distinct entities (a name, a job title, and an id number). That is generally more useful than simply grabbing a whole line of input at once.

Improved Error Handling

Parsing 38

The way the previous program responds to a missing input file can be improved:

```
// ...
string fName = "String1.dat";
ifstream iFile(fName.c_str());
while ( iFile.fail() ) {

    iFile.clear();

    cout << "File not found: " << fName << endl;
    cout << "Please enter new name: ";

    getline(cin, fName);

    cin.ignore(1, '\n');

    iFile.open(fName.c_str());

}
// ...
```

- Clear the input stream following failure.
- Prompt user for new file name.
- Read the file name (until a newline is found). Now it gets ugly. The user has to press Return twice. Once to flush the keyboard buffer and once to satisfy getline(). That leaves an extra newline in the input stream.
- Get rid of the second newline.
- Try to open input file again.

Input stringstream Objects

Parsing 39

C++ also provides input streams that may be hooked to string objects:

```
string Greetings("Hello, world!");
istringstream In(Greetings);
```

header file: <sstream>

istringstream objects may be used to parse the contents of string objects in much the same way that ifstream objects may be used with files:

```
In >> Word1 >> Word2;
cout << setw(3) << Word1.length() << ":" << Word1 << endl;
    << setw(3) << Word2.length() << ":" << Word2 << endl;
```

will print: 6:Hello, 6:world!

That's the same behavior as if we were extracting from an istream or an ifstream.

There are times when it's easiest to grab an entire block of characters into a string object and then parse them with an istringstream; for one thing this allows you to back up as far as you like in the string.

stringstream Example

Parsing 40

```
#include <fstream> // file streams
#include <iostream> // standard streams
#include <sstream> // string stream support
#include <string> // string variable support

using namespace std; // using standard library

void main() {

    string FullLine;
    string EmployeeName, JobTitle; // strings for name and title
    int EmployeeID; // int for id number

    string fName = "String.dat";
    ifstream iFile(fName.c_str());
    while ( iFile.fail() ) {
        iFile.clear();
        cout << "File not found: " << fName << endl;
        cout << "Please enter new name: ";
        getline(cin, fName);
        cin.ignore(1, '\n');
        iFile.open(fName.c_str());
    }
}
```

StringStream Example

Parsing 41

```
getline(iFile, FullLine); // read first line into a string

while (iFile) {

    istringstream In(FullLine);

    getline(In, EmployeeName, '\t');
    getline(In, JobTitle, '\t');
    In >> EmployeeID;

    cout << "Next employee: " << endl;
    cout << EmployeeName << endl
         << JobTitle   << "    "
         << EmployeeID << endl << endl;

    getline(iFile, FullLine);
}

iFile.close();
```

Associate an istringstream with FullLine.

Parse FullLine for the Name, Title and ID. Note that the operations are identical to those for an ifstream.

What's the advantage? Not much, here. However, with this approach the contents of FullLine could be searched and/or modified with the usual string functions, in addition to being parsed. At the least, stringstreams are a handy tool.

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Output StringStream Objects

Parsing 42

C++ also provides output streams that may be hooked to string objects:

header file: <sstream>

```
string Greetings;
ostringstream Out(Greetings);

ostringstream objects may be used to write the contents of string objects in much
the same way that ofstream objects may be used with files:

cout << "Please enter your name: ";
string UserName;
cin >> UserName; // assume user enters Fred
Out << "Hello, " << UserName << endl;

Greetings will now contain:  "Hello, Fred"

Moreover, you can even use output manipulators with ostringstream objects.

ostringstream objects are primarily useful for assembling complex output before
committing it to file or the screen.
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Parsing Tab-separated Input

Parsing 43

Consider the problem of parsing a script file which contains lines of the following form:

```
<command> <tab> <tab-separated parameters> <newline>
```

For example:

```
; Parser test input 01
;
reverse parse this line
;
sort      gamma    alpha    delta
;
add       17       43       29
exit
```

The lines beginning with semicolons are comment lines which should be ignored, but we'll ignore that issue for now and focus on the actual command lines.

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

The Issues

Parsing 44

Given the line

```
reverse parse this line
```

the program should identify the command "reverse" and then take the appropriate action with the remainder of the line, which should result in something like:

```
"parse this line" reversed is:  esrap siht enil
```

There are two parsing issues here:

- How do we deal with identifying the command?
- How do we break the line up into logical tokens?

The first issue may be handled flexibly by making use of strings, stringstreams, and an enumerated type.

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Top-Level Organization

Parsing 45

Here's one approach:

```
void main() {  
    string inputFileName = "script.txt";  
    ifstream iFile(inputFileName.c_str());  
  
    if (iFile.fail()) {  
        cout << "File not found: " << inputFileName << endl;  
        return;  
    }  
  
    string Next = Parser(iFile);           // get first line of input  
  
    while ( iFile ) {                     // quit on stream failure  
        if ( ProcessCmd(Next) == EXIT) return; // process this command line  
        Next = Parser(iFile);             // try for another line  
    }  
  
    iFile.close();  
}
```

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Getting the Next Input Line

Parsing 46

This will return the next non-empty line, if any, of the input file as a string:

```
string Parser(istream& In) {  
    string nextLine;  
    getline(In, nextLine, '\n');           // eat a line  
  
    while ( In && ( nextLine.length() == 0 ) ){ // don't accept an empty one  
        getline(In, nextLine, '\n');  
    }  
  
    return nextLine;  
}
```

Note that this does not take the comment lines into account.

Since main ( ) makes no provision for dealing with comments, this must be extended to also reject comment lines.

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Identifying the Command

Parsing 47

The current command line can be parsed with a stringstream:

```
Command ProcessCmd(string cmdLine) {  
    string cmdString;  
    stringstream In(cmdLine);           // attach a stream to the string  
  
    getline(In, cmdString, '\t');        // read the command string  
  
    Command thisCmd = Classify(cmdString); // map it to an enumerated value  
  
    switch ( thisCmd ) {                 // so it can be sorted out  
    case ADD:    handleAdd(In);          // with a switch statement  
                break;                 // and the stream can then  
    case REVERSE: handleReverse(In);     // be passed on to the  
                break;                 // appropriate handler  
    case SORT:   handleSort(In);  
    };  
    return thisCmd;  
}
```

enum Command {ADD, REVERSE, SORT, EXIT, UNKNOWN};

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

Mapping a String to a Command

Parsing 48

The mapping can be done with a simple sequence of if statements:

```
Command Classify(string cmdString) {  
    if (cmdString == "add")    return ADD;  
    if (cmdString == "reverse") return REVERSE;  
    if (cmdString == "sort")  return SORT;  
    if (cmdString == "exit")  return EXIT;  
    return UNKNOWN;  
}
```

A few points:

- The comparisons are case-sensitive (that can be changed).
- This is easily extended to handle different or additional commands.
- A default value is needed in case no matching command can be found.

Computer Science Dept Va Tech January 2001

Parsing ASCII Text

©2000-2001 McQuain WD

## Handling a Command

Parsing 49

The reverse command is handled easily with stream and string members:

```
void handleReverse(istream& In) {  
  
    string Next;  
    getline(In, Next, '\\t');    // The istringstream is read just the  
                                // same as any other stream  
  
    while ( In ) {  
  
        for (int Idx = Next.length() - 1; Idx >= 0; Idx--) {  
            cout << Next.at(Idx);  
        }  
        cout << '\\t';  
  
        getline(In, Next, '\\t'); // This fails at the end of the string,  
                                // terminating the loop.  
    }  
    cout << endl;  
}
```