# CSCI 132: Basic Data Structures and Algorithms

Queues (Linked List implementation)


Reese Pearsall Spring 2024

#### Announcements


Lab 8 due **tomorrow** at 11:59 PM


No class on Friday (university day)

Program 3 posted, due April 5th

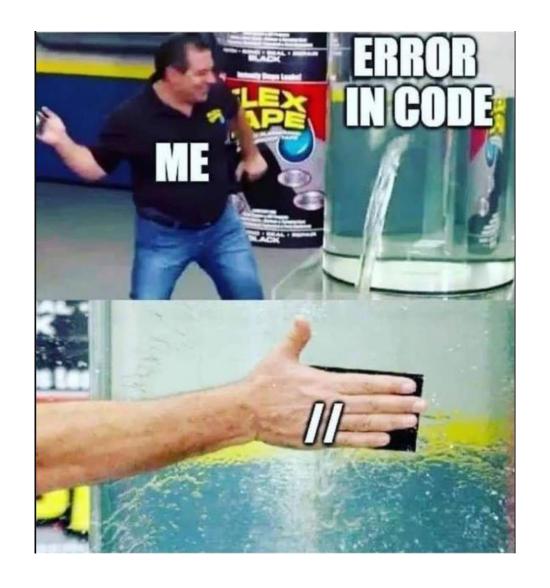


### Announcements

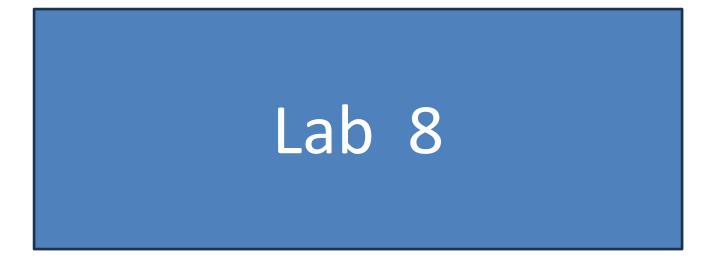

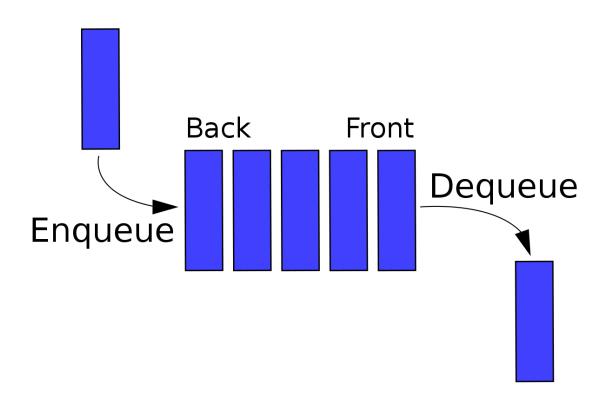



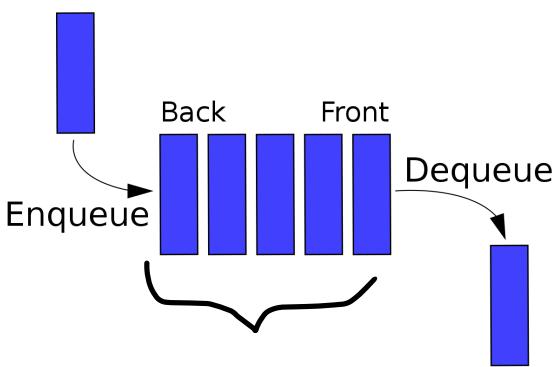

Once again, we need a data structure to hold the data of the queue

- Linked List (today)
- Array (tomorrow)

Elements get added to the **Back** of the Queue.

Elements get removed from the Front of the queue




The Queue ADT has the following methods:

Enqueue- Add new element to the queue


**Dequeue-** Remove element from the queue

\*\* Always remove the front-most element


Peek()- Return the element that is at the front of the queue

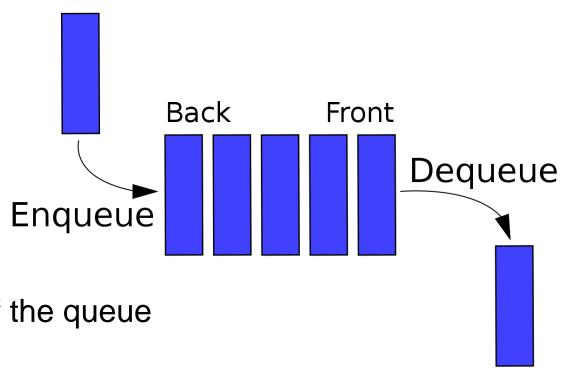


**IsEmpty()** – Returns true if queue is empty, returns false is queue is not empty

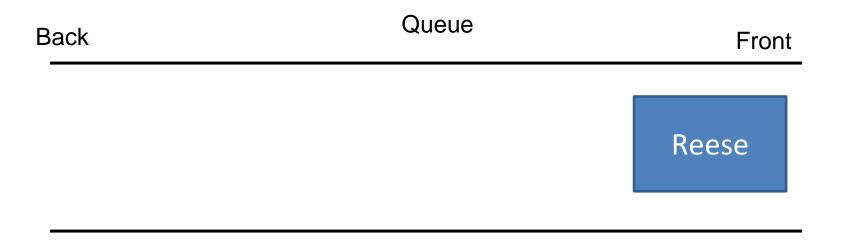


queue.enqueue("Reese");

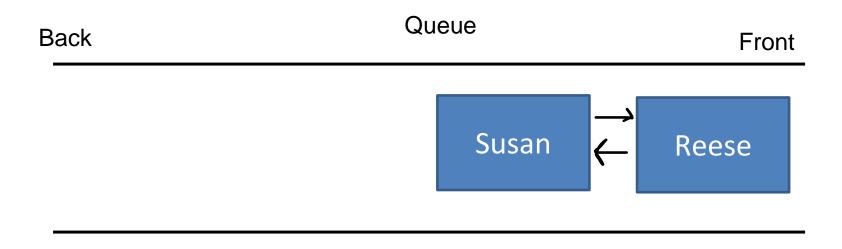


queue.enqueue("Reese"); queue.enqueue("Susan");

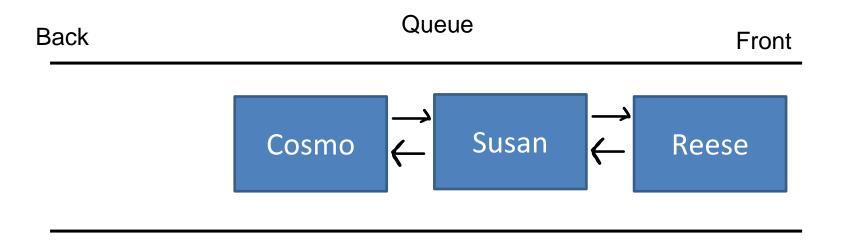

```
queue.enqueue("Reese");
queue.enqueue("Susan");
queue.enqueue("Cosmo");
```

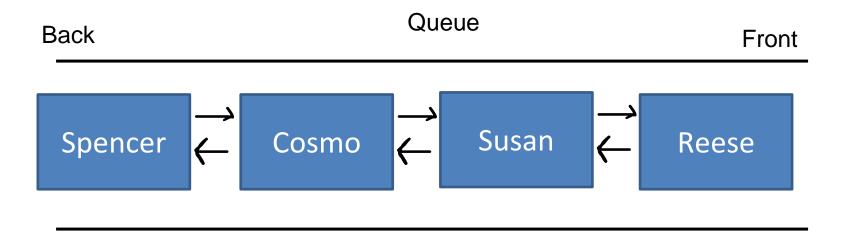


```
queue.enqueue("Reese");
queue.enqueue("Susan");
queue.enqueue("Cosmo");
queue.enqueue("Spencer");
```

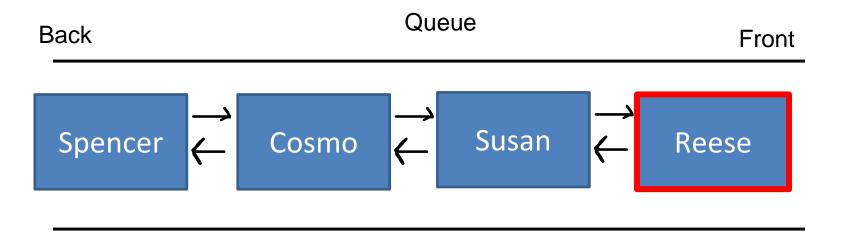


```
queue.enqueue("Reese"); queue.d
queue.enqueue("Susan");
queue.enqueue("Cosmo");
queue.enqueue("Spencer");
```

queue.dequeue()

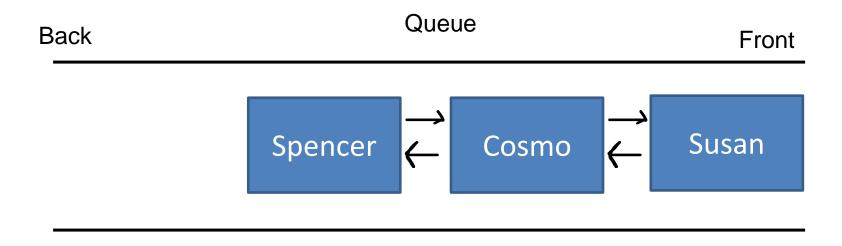


```
queue.enqueue("Reese");
queue.enqueue("Susan");
queue.enqueue("Cosmo");
queue.enqueue("Spencer");
```

queue. dequeue()

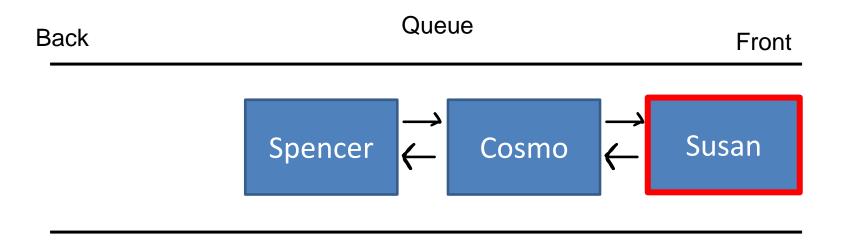


```
queue.enqueue("Reese"); queue.eq
queue.enqueue("Susan"); queue.enqueue("Cosmo");
queue.enqueue("Spencer");
```


queue. dequeue() queue. dequeue()

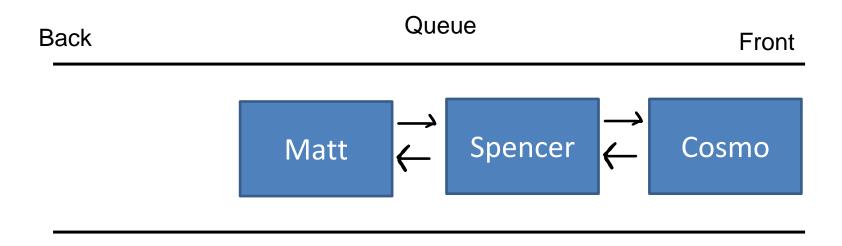

```
queue.enqueue("Reese"); queue. dequeue()
queue.enqueue("Susan"); queue. dequeue()
queue.enqueue("Cosmo");
queue.enqueue("Spencer"); queue.enqueue("Matt");
```

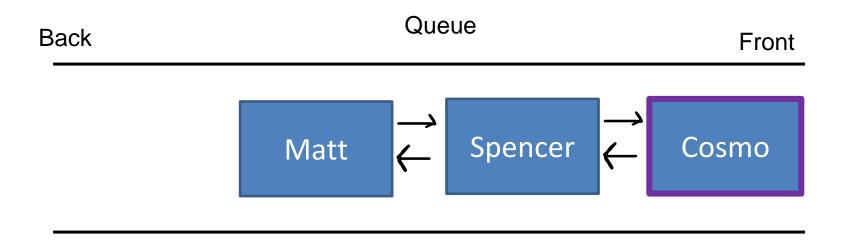


```
queue.enqueue("Reese"); queue. dequeue()
queue.enqueue("Susan"); queue. dequeue()
queue.enqueue("Cosmo");
queue.enqueue("Spencer"); queue.enqueue("Matt");
queue.peek()
→ "Cosmo"
```

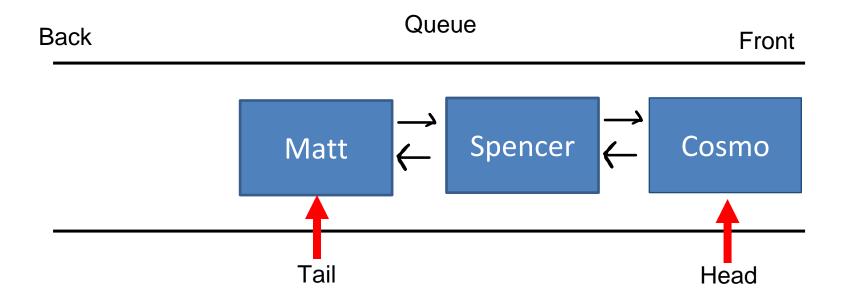

**Linked List Implementation** 

When we enqueue, we add the element to ????


When we dequeue, we remove the element from ????

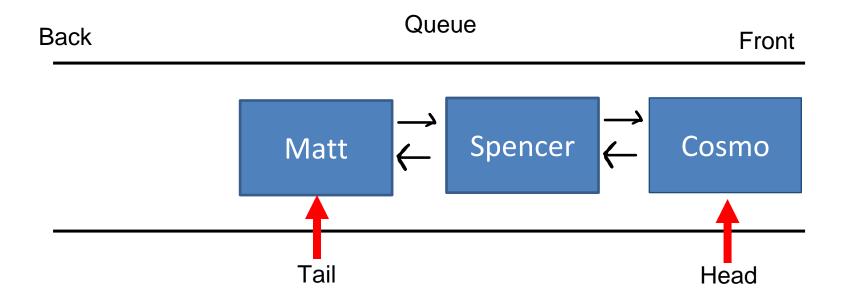

**Linked List Implementation** 

When we enqueue, we add the element to the end of the linked list

When we dequeue, we remove the element from the beginning of the linked list

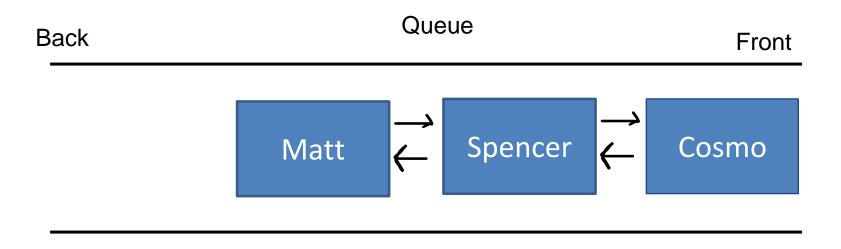

As we use our queue, we might need to keep track of a few things

- The **size** of the queue
- The front of the queue (not when we use LLs)
- The back of the queue (not when we use LLs)